DOOR WORKS COMPANY MACHINING SHEET

Date:

Dealer:
Contact:
Email:

Phone #:
Fax #
Job Name:

Fire Rating: ☐ Neutral Pressure ☐ Positive Pressure
☐ 20 min ☐ 45 min ☐ 60 min ☐ 90 min

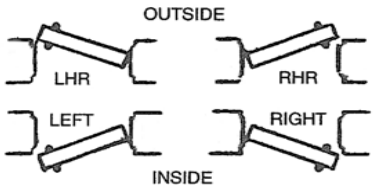

Door Design:

Style:

Sticking:

Panel Profile:

Pre-fit size: Frame size:
W: W:
H: H:
T:

LEED

☐ MR 4.1 and 4.2 - Recycled Content
☐ MR 5.1 Local and Regional
☐ MR 5.2 Local and Regional
☐ IEQ 4.4 - No Added Urea-Formaldehyde

Louvers:

☐ Cutout Only ☐ Metal ☐ False
size: ☐ True

Light Openings:

☐ Cutout Only ☐ SDL ☐ TDL
Size: ☐ Fire Rated (SDL)

Glass type:

Thickness:

Door No.:	Swing:

Hinge (Top of door to top of hinge):

Hinge 1:
Hinge 2:
Hinge 3:
Hinge 4:

Backset:

Size:
☐ 3.5"
☐ 4.0"
☐ 4.5"
☐ Other

Corner:
☐ 5/8" Radius
☐ Square

Thickness:

Bevel:

Active:	Inactive:
☐ None	☐ None
☐ Hinge	☐ Hinge
☐ Lock	☐ Lock
☐ Both	☐ Both

Hardware Description	Model	Template	Door

Lock (top down):

CL Lock:
CL Deadbolt:
Diameter:
Backset:

Stike Plate:
Length:
Width:
Depth:
Corner:

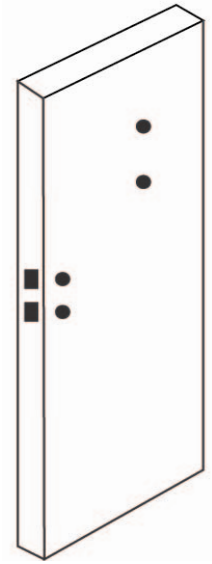

Viewers (bottom up):

Diameter:
1st:
2nd:

Mortise Lock (top down):

Center Lock
Face Plate:

Flush Bolt (top down):
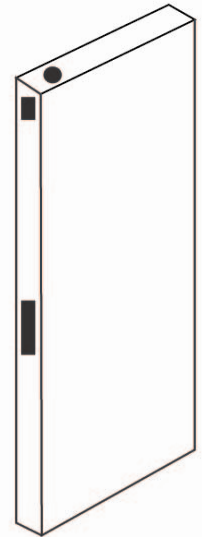
Stike Plate:
Length:
Width:
Depth:
Corner: